

Neutralization of Acidity (pH) and Reduction of Total Suspended Solids (TSS) by Solar-Powered Electrocoagulation System

by Elanda Fikri


Submission date: 26-Apr-2023 12:08PM (UTC+0700)

Submission ID: 2075855304

File name: 23-03-2023_4005-10267-1-RV_Clean_-_Copy.docx (1.23M)

Word count: 7129

Character count: 40143



Neutralization of Acidity (pH) and Reduction of Total Suspended Solids (TSS) by Solar-Powered Electrocoagulation System

Elanda Fikri^{1,2*}, Irfan Arief Sulistiawan³, Agus Riyanto⁴, Aditiyana Eka Saputra⁴

¹Department of Environmental Health, Bandung Health Polytechnic, North Cimahi, West Java, Indonesia, 40514

²Center of Excellence on Utilization of Local Material for Health Improvement, Bandung Health Polytechnic, 40171

³Environmental Health Installation, West Java Province Mental Hospital, Cisarua, Indonesia, 40551

⁴Faculty of Health Sciences and Technology, Jenderal Achmad Yani, West Java, Indonesia. 40633

Abstract

This study investigates the effect of electrocoagulation contact time on pH and TSS of wastewater discharged from the wastewater treatment plant (WWTP) of the Psychiatric Hospital of West Java Province. The experiment followed the pretest-posttest control group design. This study involved testing of 56 wastewater samples six times before and after treatment. Each treatment was repeated four times, and there was one control group for each repetition. The electrocoagulation tool used in this study consisted of 6 1-mm electrode plates which were 8 cm apart, a current strength of 5A, a voltage of 12V, and a 50-Watt solar panel. The data were analyzed using descriptive and inferential statistics. The results showed that all electrocoagulation contact time treatments had a significant effect on increasing the pH and the TSS. Additionally, the electrocoagulation tool was found to be effective, stable, portable, and environmentally friendly, with a self-cleaning system that reduced operational costs and saved electricity through the use of solar panels. This study contributes to the development of an effective electrocoagulation toll for wastewater treatment and the determination of optimal contact time for the tool, providing a practical solution to overcome the problems of pH and TSS in wastewater. These findings can be applied to other wastewater treatment plants, thus improving the quality of discharged wastewater.

* Corresponding author:

<http://dx.doi.org/10.28991/cej-202X-XXXXXXX>



© 2021 by the authors. Licensee C.E.J, Tehran, Iran. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).

Keywords: wastewater; electrocoagulation contact time; pH; TSS; solar panel

1. Introduction

Hospital waste is all waste generated from hospital activities in solid, liquid, and gas forms. Wastewater is all wastewater including feces originating from hospital activities which may contain pathogenic microorganisms and toxic and radioactive chemicals that are harmful to the health. Therefore, every hospital must treat its wastewater so that it meets the standard requirements and does not have a direct effect on the health [1].

There are 334 hospitals in West Java Province that are making efforts to secure waste from Indonesian healthcare facilities. Based on the recapitulation of wastewater discharge, the daily average of hospital wastewater discharge is 0.35 m³/bed. Of the 334 hospitals, only 39 hospitals have reported their wastewater discharge, including the Psychiatric Hospital of West Java Province [2].

The Psychiatric Hospital of West Java Province is a healthcare facility located in West Bandung Regency that has a wastewater treatment plant (WWTP) using an aerobic-anaerobic biofilter system. The basic principle of the system is to utilize aerobic and anaerobic bacteria in the filter to decompose pollutants in water that occur in the process of releasing nitrogen ions that are previously bound to ammonia (NH₃) into nitrates and nitrites. As a result, the degree of acidity (pH) in water decreases and tends to be acidic and increases the total suspended solids (TSS) which can be harmful to the environment [3,4].

pH is a degree which indicates the acidity or alkalinity in a solution. pH is defined as the cologarithm of the activity of dissolved hydrogen ions (H⁺) [5]. The standard for pH of wastewater is 6-9, which is in accordance with the wastewater quality standards set by the Minister of Environment and Forestry of the Republic of Indonesia under the Regulation Number P.68/Menlhk-Setjen/2016 concerning Domestic Wastewater Quality Standards. Wastewater whose pH does not meet the standards, especially if it is continuously discharged into the environment, can cause the aquatic organisms to die and disrupt the ecosystems [6].

Total suspended solids (TSS) are all types of solids that comes from total solids that are retained on a filter with a maximum particle size of 2.0 μm [7,8]. The standard for TSS in wastewater is 30 mg/L, which is in accordance with the wastewater quality standards set by the Minister of Environment and Forestry of the Republic of Indonesia under the Regulation Number P.68/Menlhk-Setjen/2016 concerning Domestic Wastewater Quality Standards. The high level of TSS in wastewater that is contained in water bodies can cause the high turbidity of the water bodies. As a result, sunlight, which is needed by autotrophs to carry out natural remediation (photosynthesis) in the river, will be hampered from entering the riverbed [9].

According to the preliminary study of routine wastewater testing conducted by the authors, the pH value of the Wastewater Treatment Plant of the Pyschiatric Hospital of West Java Province was 4-6 and the TSS level was 35-45 mg/L [10]. On the other hand, the wastewater testing conducted by the environmental laboratory showed that the pH value of the wastewater treatment plant was 4.5 and the TSS level was 45 mg/L. The previous studies showed that the pH value and the TSS level has not met the quality standards. Treatments can be done using the latest technology that involves either physical, chemical, and biological systems or a combination of the three [11]. One of the combinations of physical and chemical systems is electrocoagulation [12,13].

Electrocoagulation is the process of coagulation and deposition of fine particles contained in wastewater using electrical energy. Electrocoagulation is a more advanced technology and has more advantages compared to chemical coagulation that can damage the environment [14–18], one of which is that electrocoagulation can increase the pH value and decrease the TSS level in wastewater [18–20]. Various treatments were done to the wastewater using aluminum electrodes with different contact times and voltages. The treatment results using aluminum electrodes at 12V for 60 minutes showed positive results, that is, an increase in the degree of acidity by 16%.

Amri et al. [21] also suggested that electrocoagulation using aluminum electrodes can increase the pH value of wastewater. Various treatments were done with different voltages and flow rates [21]. The treatment results at a voltage of 12V and a flow rate of 0.087 L/m also showed positive results, that is, an increase in the degree of acidity from 3.6 to 6.7 and a decrease in the level of TSS by 90.90% from 1100 mg/L to 100 mg/L [21]. Other researchers gave different treatments in terms of contact time, which is a factor in the electrocoagulation process [22]. The results showed that increasing the contact time of electrocoagulation can increase the efficiency of pollutant removal [23–25].

Electrocoagulation is quite effective in reducing the values of turbidity, color, free ammonia, TSS, and heavy metal as well as improving the pH value in wastewater treatment of non-fishery industry [26–28]. However, electrocoagulation has not been widely applied to hospital wastewater management. Hospital wastewater has relatively the same characteristics of pollutant load as domestic wastewater.

Previous studies have reported the use of electrocoagulation for wastewater treatment from various sources. For example, Raju et al. [29] investigated the use of electrocoagulation for the removal of suspended solids from textile wastewater, while Omwene et al. [30] investigated the effect of electrocoagulation on the removal of suspended solids and chemical oxygen demand (COD) from municipal wastewater. Meanwhile, Rookesh et al. [31] investigated the removal of COD and TSS from landfill leachate using electrocoagulation. Lastly, Koby et al. [32] investigated the removal of pollutants from textile wastewater using electrocoagulation.

While the abovementioned studies have provided valuable insights into the use of electrocoagulation for wastewater treatment, there is still a gap in the literature regarding the use of solar-powered electrocoagulation for wastewater treatment. This is important because the use of solar panels may provide a sustainable and cost-effective solution for wastewater treatment in areas with limited access to electricity. To address this gap, this study aims to investigate the use of solar-powered electrocoagulation to neutralize the pH and reduce the TSS in wastewater. This study evaluates the effectiveness of the system in treating the wastewater from the wastewater treatment plant of the Psychiatric Hospital of West Java Province. The findings of this study may contribute to the development of sustainable and cost-effective solutions for wastewater treatment, particularly in areas with limited access to electricity.

2. Methods

This study is a pretest-posttest true experimental control group design. Before the treatment, randomization was carried out in each experimental and control groups so that both groups had the same characteristics. Subsequently a pretest was carried out in all experimental groups, followed by a posttest. The posttest results of all groups were referred to as the effect of treatment [33]. This study was conducted between May and June 2022.

The population was all wastewater from the wastewater treatment plant (WWTP) of the Psychiatric Hospital of West Java Province. The sample was chosen using simple random sampling by means of chemical deoxygenation. The sample size was determined randomly because the sample was relatively homogeneous and the entire population had the same opportunity to become the chosen.

The experiments were done six times for 10, 20, 30, 40, 50, and 60 minutes. Each experiment was repeated four times. Therefore, there were 24 samples in the experimental group. In addition, one sample was in the control group for each repetition, resulting in 28 samples in total. Moreover, there were seven samples for each repetition. Each sample consisted of 3,000 ml of wastewater, and thus each repetition consisted of 21,000 ml of wastewater. In other words, the sample size was 84,000 ml of wastewater for four repetitions.

This study used a tool, that is, an electrocoagulation bath with a configuration of six aluminum plates equipped with (1) an integrated total solids spectrophotometer, which was used to measure TSS in wastewater; (2) a stopwatch which was used to measure the contact time in the electrocoagulation process; (3) a multimeter, which was used to measure the electrical voltage in the electrocoagulation process; (4) a stabilizer, which was used to stabilize the electrical voltage in the electrocoagulation process; (5) a 12V and 5A transformer; and (6) a mini generator as a power backup.

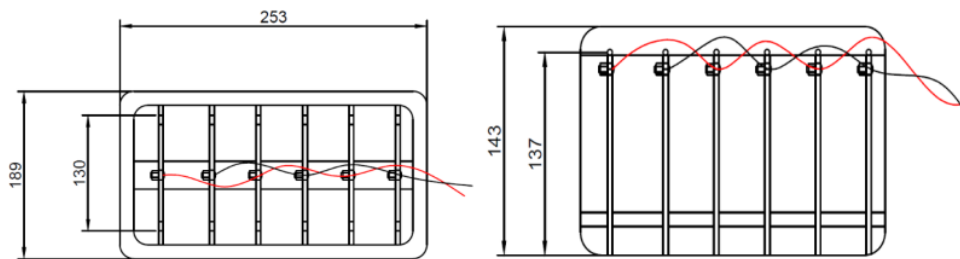


Figure 1. Electrocoagulation bath design in cm (left to right: top view, lateral view)


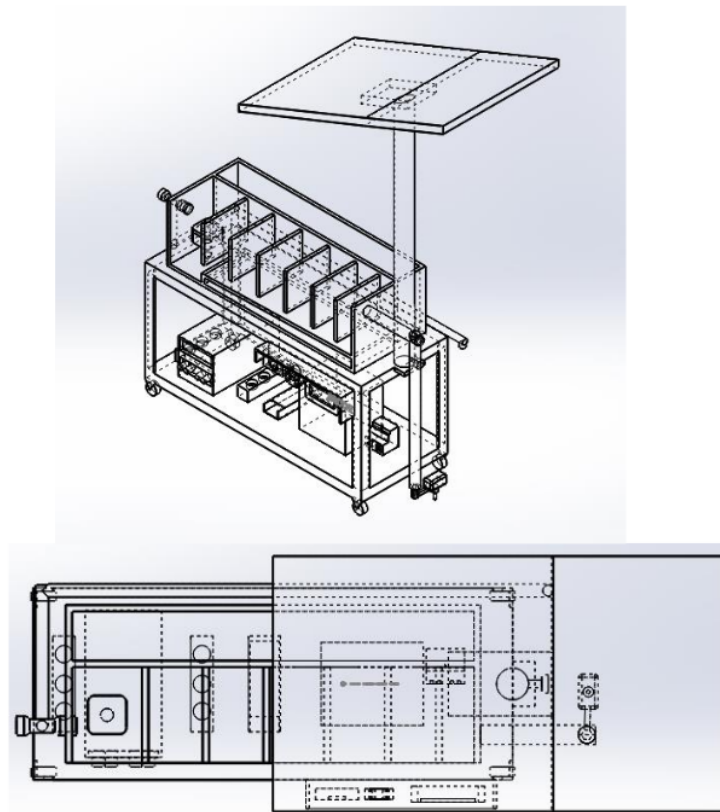


Figure 2. Solar-powered electrocoagulation

The wastewater was contacted with six aluminum plates in the electrocoagulation bath for 10, 20, 30, 40, 50, and 60 minutes to determine the effect of contact time on the degree of acidity (pH) and the level total suspended solids (TSS). The pH was determined using a pH meter with the Indonesian National Standard number 06-6989.11-2004, while the TSS was determined using a gravimetric analysis with a balance with the Indonesian National Standard number 06-6989.3-2004. The following Figure 3 shows the research flowchart:

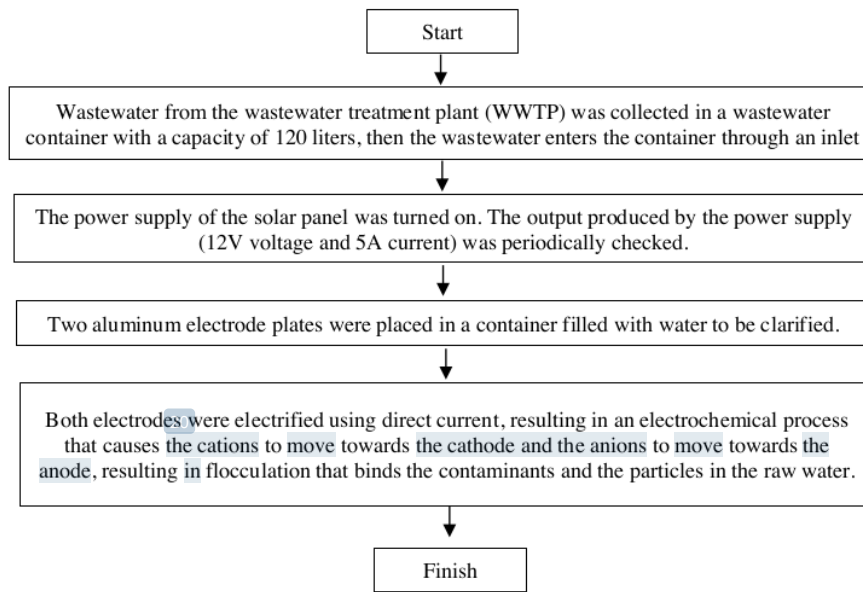

Based on the results of the experiment, a p-value of $0.0001 < 0.005$ was obtained, which means that all treatments had an effect on the increase in pH and the decrease in TSS. In addition, a p-value of $0.0001 < 0.005$ was obtained from the results of the ANOVA test, which means there was a significant difference among the six treatments.

3. Results


Electrocoagulation is the process of coagulation and deposition of fine particles in wastewater using electrical energy. The process is carried out in an electrolysis container in which there are two direct current conductors known as electrodes [34]. Electrocoagulation produces metal cations in situ electrochemically using an anode (usually aluminum or iron). The cations are hydrolyzed in water to form hydroxides whose species is determined by the pH of the solution. The highly charged cations destabilize colloidal particles by forming polyvalent polyhydroxide complexes. These complexes have high absorption properties and form aggregates with pollutants [35,36].

One of the important parameters in the electrocoagulation process is contact time. Contact time is also associated with reaction rate, which is expressed as a change in concentration over time. The longer the electrocoagulation process, the more H_2 , and OH^- are formed. As a result, the number of complexes that bind pollutants and the amount of hydrogen gas increases [37–39]. The electrocoagulation process is the development of the electrolysis process, that is, the decomposition of electrolytes by direct current using two electrodes, namely cathode and anode [40–42]. In the process of electrolysis and electrocoagulation, the cathode acts as the negative pole. At the cathode, a reduction reaction occurs because cations (positive ions) are attracted to the cathode, thus receiving additional electrons which reduce the oxidation number. The cathode will produce hydrogen ions which remove the flocculants formed in the electrocoagulation process. After the electrocoagulation process is finished, white spots will stick to the cathode as a sign of the release of hydrogen ions there [43]. In contrast to the cathode, the anode acts as the positive pole. At the anode, an oxidation reaction occurs because anions (negative ions) are attracted to the anode, thus releasing electrons which increase the oxidation number. As a result, the flocculants formed in the electrocoagulation process will stick to the anode as a coagulant [44,45].


Aluminum is a silvery-white metal and is the thirteenth element in the periodic table. Pure aluminum is not found in nature because of its tendency to easily bond with other elements [46]. Aluminum is the most common electrode material used in the electrocoagulation process. The aluminum electrode is oxidized as Al^{3+} . The resistivity of aluminum is 2.65×10^{-8} ohms. In many cases, aluminum electrodes are more effective in terms of removal compared to other electrodes [47].

Aluminum has been widely used in the electrocoagulation process. When aluminum is used as the anode, metal ions are released from the anode and hydrolyzed ionic monomers are formed, depending on the pH of the solution. The reactions that occur at the electrodes according to Khandegar and Saroha [48] are as follows:


Oxidation reaction at the anode:



Reduction reaction at the cathode:



All reactions during the electrolysis:



The use of electrocoagulation (EC) for wastewater treatment has gained increasing attention in recent years due to its advantages, such as high efficiency, low energy consumption, and environmentally friendly operation. Several studies have been conducted to investigate the effectiveness of EC in removing various pollutants from wastewater, including pH and TSS. For example, Khandegar [49] used EC to remove TSS from textile wastewater, while Li et al. [50] used EC to remove pH from landfill leachate. However, the effectiveness of EC in different countries still needs to be investigated. In Iran, Nouri et al. [51] investigated the use of EC to remove zinc and copper from aqueous solutions. In Turkey, Koyuncu et al. [52] investigated the use of EC for domestic wastewater treatment. In Indonesia, Alam et al. [53] investigated the use of EC to remove Fe from mining wastewater. Lakshmi and Sivashanmugam [54] in India investigated the use of EC for oil tanning, while Tak et al. [55] in Korea investigated the use of EC to remove color and COD from livestock wastewater. In Jordan, Al-Shannag et al. [56] investigated the use of EC to remove TSS and COD from paper mill wastewater. In China, Sia et al. [57] investigated the use of EC to remove TSS, COD and color from palm oil mill effluent. In Saudi Arabia, Al-Othman et al. [58] examined the use of EC for municipal wastewater treatment. Lastly, in Brazil, Valente et al. [59] investigated the use of EC to remove TSS from dairy industry wastewater.

Overall, while there are many studies on the use of EC for wastewater treatment, few studies have focused on the effectiveness of EC in different countries. Therefore, this study aims to investigate the effectiveness of EC for the removal of pH and TSS from wastewater from a psychiatric hospital in West Java, Indonesia and to compare the results with similar studies conducted in other countries. The findings of this study will contribute to a better

understanding of the effectiveness of EC in wastewater treatment and provide insights for future research and application of this technology in different countries.

The results of the pH examination in this study are presented in the following tables.

Table 1. pH values of the control group without any treatment (60 minutes)

Repetition	pH Values			Description	Quality Standard
	Before	Description	After		
1	3.63		3.63		
2	3.71	Does not meet the requirements	3.71	Does not meet the requirements	6-9
3	3.69		3.69		
4	3.7		3.7		

Table 1 above shows that the pH value before and after each repetition did not change and was considered not meeting the standard requirements of wastewater set by the Minister of Environment and Forestry. The WWTP of the Psychiatric Hospital of West Java Province had a low or acidic pH value due to the decomposition of nitrogen ions that were previously bound to ammonia (NH₃) into nitrates and nitrites. The hydrogen ions released from the nitrogen ions became free, causing the pH of the wastewater to become acidic.

Table 2. pH value with various electrocoagulation contact times

Repetition	pH Value			Description	Quality Standard
	Before	Description	After		
10 Minutes Treatment					
1	3.79		5.94		
2	3.73	Does not meet the requirements	5.99	Does not meet the requirements	
3	3.77		5.95		
4	3.78		5.94		
20 Minutes Treatment					
1	3.72		6.44		
2	3.75	Does not meet the requirements	6.41	Meets the requirements	
3	3.74		6.44		
4	3.72		6.47		
30 Minutes Treatment					
1	3.76		6.65		
2	3.77	Does not meet the requirements	6.69	Meets the requirements	
3	3.73		6.71		
4	3.77		6.68		
40 Minutes Treatment					
1	3.75		7.09		
2	3.76	Does not meet the requirements	7.15	Meets the requirements	
3	3.73		7.18		
4	3.78		7.16		
50 Minutes Treatment					
1	3.76		7.38		6-9
2	3.76	Does not meet the requirements	7.41	Meets the requirements	
3	3.75		7.39		
4	3.77		7.38		
60 Minutes Treatment					
1	3.75		7.76		
2	3.76	Does not meet the requirements	7.81	Meets the requirements	
3	3.77		7.77		
4	3.75		7.79		

Table 2 above shows that the pH value before treatment did not meet the standard requirements of wastewater set by the Minister of Environment and Forestry. After 10 minutes of treatment, there was a change in the pH value, but it did not meet the standard requirements of wastewater yet. However, after 20 to 60 minutes of treatment, the pH value finally met the standard requirements of wastewater. After 60 minutes of treatment, the pH value increased, approaching the pH value of alkaline.

The results of the data analysis showed that 10-minute electrocoagulation contact time could increase the pH value of the wastewater although it did not meet the standard requirements yet. This was because 10-minute contact time was not sufficient for the cation reaction to reduce water to hydrogen (H₂) and hydroxide (OH⁻) which can affect

the pH value. The ideal contact time to improve the quality of wastewater is between 15 and 30 minutes, which can increase the pH value, while the optimum contact time for the electrocoagulation process is within the initial 15 minutes [60]. Meanwhile, the optimum contact time for the electrocoagulation process to improve the quality of wastewater is 30 minutes, which can increase the pH value [60,61]. On the other hand, 45 minutes is sufficient to form flocculants via $Al(OH)_3$ as a coagulant, which can affect the pH value of the wastewater [62]. Considering the fact that the electrocoagulation process consists of cation and anion reactions, the cation reaction of H^+ from the acid will result in the reduction of hydrogen which will be released as gas bubbles. Meanwhile, the anion reaction at the anode will produce gas, foam, and $Al(OH)_3$ [63]. At 50-minute contact time, there was a considerable change in the pH value [64]. Electrocoagulation contact time can increase the efficiency of pollutant removal [65]. Lastly, the 60-minute contact time of electrocoagulation with aluminium electrodes was found to be the most effective in increasing the pH value [66–68].

The changes in pH in the electrocoagulation process were due to the electrolysis process through aluminium consisting of a cathode and an anode. At the cathode, a reduction reaction occurs because the negative attracts the positive ions, resulting in the formation of H_2 and OH^- . Meanwhile, at the anode, the pH value in the wastewater increases. This is in line with the previous study by Kobya et al. [69] that the cathode in the electrocoagulation process will produce H_2 and OH^- which will affect the pH value. The longer the contact time and the higher voltage used in electrocoagulation, the greater the reduction of wastewater pollutants that occurs [69]. In this sense, if the electrocoagulation contact time is extended, there is a possibility that the pH will become very alkaline (>9), which can also be harmful to the environment [70].

pH is an important parameter in the electrocoagulation process as it can affect the solubility of metal ions and the formation of flocculants, which can affect the efficiency of pollutant removal. The pH value that is too low or too high may result in incomplete coagulation or destabilization of flocculants, leading to poor treatment efficiency. Generally, the optimal pH value for electrocoagulation ranges between 6 and 8.5.

According to Arroyo et al. [71], pH affects the electrocoagulation process due to its effect on the electrochemical reactions that occur at the anode and cathode. At a low pH, the concentration of H^+ ions increases, leading to a decrease in the solubility of metal ions and a decrease in the rate of coagulation. On the other hand, at a high pH, the concentration of OH^- ions increases, resulting in the formation of insoluble metal hydroxides that can reduce the efficiency of pollutant removal.

The results of the TSS examination in this study are presented in the following tables.

Table 3. TSS level without any treatment (60 minutes)

Repetition	TSS Level				Quality Standard
	Before	Description	After	Description	
1	122		122		30
2	123	Does not meet the requirements	123	Does not meet the requirements	
3	123		123		
4	122	122			

Table 3 above shows that the TSS value before and after each repetition did not change and was considered not meeting the standard requirements set by the Minister of Environment and Forestry because it exceeded the quality standard of 30 mg/L. The WWTP of the Psychiatric Hospital of West Java Province had a high TSS level because the biofilter was full of mud. Excess mud in the biofilter causes suspended particles to be carried away, resulting in the high TSS level of the wastewater.

Table 4. TSS level with various electrocoagulation contact times

Repetition	TSS Level				Quality Standard
	Before	Description	After	Description	
10 Minutes Treatment					
1	122		39		30
2	124	Does not meet the requirements	37	Does not meet the requirements	
3	123		36		
4	123	38			
20 Minutes Treatment					
1	123		36		30
2	122	Does not meet the requirements	34	Does not meet the requirements	
3	124		34		
4	122	35			
30 Minutes Treatment					
1	122		34		30
2	123	Does not meet the requirements	33	Does not meet the requirements	
3	123		32		

Repetition	TSS Level			Description	Quality Standard
	Before		After		
4	124		31		
40 Minutes Treatment					
1	124		30		
2	124	Does not meet	28	Meets the requirements	
3	123	the requirements	29		
4	122		28		
50 Minutes Treatment					
1	122		25		
2	121	Does not meet	23	Meets requirements	
3	123	the requirements	24		
4	124		24		
60 Minutes Treatment					
1	122		20		
2	121	Does not meet	19	Meets requirements	
3	124	the requirements	19		
4	123		18		

Table 4 above shows that the TSS level before treatment did not meet the standard requirements of wastewater. At 10 minutes to 30 minutes of treatment, there was a reduction in the TSS level, but it did not meet the standard requirements of wastewater yet. After 40 to 60 minutes of treatment, the TSS level finally met the standard requirements of wastewater. After 10 to 30 minutes of treatment, the TSS level was considered not meeting the requirements because it was above the standard requirements of wastewater, which is 30 mg/L. This was because the electrocoagulation process was not maximized between 10 and 30 minutes. As a result, there was not much $\text{Al}(\text{OH})_3$ and flocculants were not formed to precipitate suspended particles. After 40 to 60 minutes of treatment, the TSS level was considered meeting the standard requirements of wastewater because it is below 30 mg/L. This was because the reaction in the electrocoagulation process was maximized between 40 to 60 minutes. As a result, there was a lot of $\text{Al}(\text{OH})_3$ and flocculants were formed which to precipitate suspended particles.

The ideal contact time to improve the quality of wastewater is between 40 to 60 minutes, which can reduce the TSS level [21], whereas the optimum contact time to improve the quality of wastewater in the electrocoagulation process is 30 minutes [72]. After 45 minutes, flocculants were formed via $\text{Al}(\text{OH})_3$. The formed flocculants bind a lot of suspended and precipitated substances, so it may reduce the TSS level in wastewater [73]. Electrocoagulation consists of the cation and anion reactions. The cation reaction of H^+ from the acid will result in the reduction of hydrogen which will be released as gas bubbles, while the anion reaction at the anode will produce gas, foam, and flocculants of $\text{Al}(\text{OH})_3$ [74].

The changes in TSS level in the electrocoagulation process occurred because of the electrolysis process through aluminium consisting of a cathode and an anode. In contrast to the cathode, as an oxidation process of the positive pole occurs at the anode, which releases the coagulant (Al^{3+}), which is aluminium, into the wastewater. This coagulant will form flocculants which will be precipitated to reduce the TSS level and improve the quality of the wastewater. This is in line with the previous study by Feng et al [75] in which the anode in the electrocoagulation process will form a coagulant (Al^{3+}) which will attract suspended particles to form flocculants that will precipitate to the bottom of the bath. The longer the contact time and the higher voltage used in electrocoagulation, the greater the pollutants that will be removed from the wastewater [75].

TSS can affect the electrocoagulation process because it can interfere with the coagulation and flocculation of suspended particles in the wastewater. TSS can also lead to fouling on the electrode surfaces, which can reduce the effectiveness of the process. The amount and nature of the suspended solids in the wastewater can also affect the performance of electrocoagulation. A study conducted by Bazrafshan et al. [76] investigated the effect of TSS on the performance of electrocoagulation for the dairy industry wastewater treatment [76]. The results showed that the efficiency of chemical oxygen demand (COD) and total suspended solids (TSS) removal decreased with the increasing concentration of initial TSS. The study suggested that the presence of TSS in wastewater can lead to a decrease in the efficiency of electrocoagulation, so it should be taken into account when designing and performing electrocoagulation systems.

3.1 Suggestions and limitations

Among the contributions of this study are as follows:

- The results of this study can increase the knowledge in wastewater management, especially in relation to increasing the pH value and reducing the TSS level in wastewater.
- The results become an input for WWTP managers in treating wastewater, especially in increasing the pH value and reducing the TSS level in wastewater.

- It becomes an alternative of wastewater management efforts.
- Further research is needed to investigate other chemicals in wastewater after the electrocoagulation process is carried out.
- A real field application of the results of this study is necessary in order to solve the problem of wastewater quality standard requirements, especially on the pH and TSS parameters.

Among the limitations of the study are in relation to the differences among implementations in the field, namely:

- In this study, the electrocoagulation bath used a batch system, while in the field implementation, a continuous system was used. In principle, the wastewater retention time will be different between batch and continuous systems. Therefore, it is necessary for further research to investigate the effect of contact time electrocoagulation using a continuous system.
- In this study, the electrocoagulation bath did not use effluents to remove wastewater. This caused the mixing of solid particles that precipitated or floated, affecting the TSS level when moving the sample into the bottle. Therefore, it is necessary to measure TSS using the total solids integrated spectrophotometry.
- In this study, only one bath of electrocoagulation was used. Therefore, the difference in treatment was not carried out simultaneously, leading to a possibility of bias in the research.
- In this study, the number of samples required was determined according to the minimum number of samples required for inspection, but did not consider the amount of wastewater discharge. Therefore, it is necessary to carry out further research by considering the amount of wastewater discharge.

4. Conclusion

Solar-powered electrocoagulation (SPEC) system has been shown to be an efficient and environmentally friendly technology for the wastewater treatment, particularly in terms of neutralizing the acidity (pH) and reducing the total suspended solids (TSS). Through a review of previous studies, it is clear that electrocoagulation has been widely investigated for its effectiveness in removing various pollutants from wastewater. However, effectiveness of this technology in different countries still needs to be investigated. The results of this study have practical implications for the development of sustainable and efficient wastewater treatment systems. This study motivates the academic community to continue researching and developing practical and actionable solutions for wastewater treatment. By exploring the potential of the SPEC system, researchers can contribute to the development of sustainable and environmentally friendly technologies for wastewater treatment, which are critical for protecting the environment and ensuring the public health.

5. Declarations

5.1. Author Contributions

Conceptualization, E.F and I.A.S.; methodology, I.A.S and A.R.; software, E.F.; validation, E.F and I.A.S.; formal analysis, E.F, I.A.S, A.R, A.E.S.; investigation, I.A.S.; resources, E.F.; data curation, E.F.; writing—original draft preparation, E.F and I.A.S.; writing—review and editing, E.F.; visualization, E.F.; supervision, E.F and I.A.S.; project administration, I.A.S.; funding acquisition, E.F and I.A.S. All authors have read and agreed to the published version of the manuscript.

5.2. Data Availability Statement

The data presented in this study are available upon request from the corresponding author.

5.3. Funding and Acknowledgments

The authors would like to thank Tirta Wening for providing laboratory facilities for the study with the certificate number 02253.22.04025.

5.4. Conflicts of Interest

The authors declare that there is no conflict of interest.

6. References

- [1] Ministry of Health of the Republic of Indonesia, Regulation of the Minister of Health Number 7 concerning Hospital Environmental Health, Secretariat of the Cabinet of the Republic of Indonesia, Indonesia, 2019.
- [2] N.I. Said, Paket Teknologi Pengolahan Air Limbah Rumah Sakit Yang Murah Dan Efisien, *J. Air Indones.* 2 (2006).
- [3] S. Arita, T.E. Agustina, N. Ilmi, V.D.W. Pranajaya, R. Gayatri, Treatment of Laboratory Wastewater by Using Fenton Reagent and Combination of Coagulation-Adsorption as Pretreatment, *J. Ecol. Eng.* 23 (2022) 211–221.
- [4] S.N. Chinedu, O.C. Nwinyi, A.Y. Oluwadamisi, V.N. Eze, Assessment of water quality in Canaanland, Ota, southwest Nigeria, *Agric. Biol. J. North Am.* 2 (2011) 577–583.
- [5] J.G. Norby, The origin and the meaning of the little p in pH, *Trends in Biochemical Sciences*, Elsevier, 2000.
- [6] I. Bashir, F.A. Lone, R.A. Bhat, S.A. Mir, Z.A. Dar, S.A. Dar, Concerns and Threats of Contamination on Aquatic Ecosystems, in: *Bioremediation Biotechnol.*, Springer International Publishing, Cham, 2020: pp. 1–26. https://doi.org/10.1007/978-3-030-35691-0_1.
- [7] H.E. Hassan, S.I. El-Khatib, M.M. Mahmoud, Study some optical properties of different total suspended solids in media filters by using He–Ne laser, *J. Opt.* 49 (2020) 248–255.
- [8] W.R. Selbig, R.T. Bannerman, Ratios of total suspended solids to suspended sediment concentrations by particle size, *J. Environ. Eng.* 137 (2011) 1075–1081.
- [9] J.-L. Wu, C.-R. Ho, C.-C. Huang, A.L. Srivastav, J.-H. Tzeng, Y.-T. Lin, Hyperspectral sensing for turbid water quality monitoring in freshwater rivers: empirical relationship between reflectance and turbidity and total solids, *Sensors.* 14 (2014) 22670–22688.
- [10] Haryanti N, Self-monitoring Report of Hospital wastewater. Soul Prov. West Java Months January, February, March, Bandung, n.d.
- [11] P. Ginting, *Teknologi Pengolahan Limbah*, Penerbit Pustaka Sinar Harapan. Jakarta. (2002).
- [12] E.A. Vik, D.A. Carlson, A.S. Eikum, E.T. Gjessing, Electrocoagulation of potable water, *Water Res.* 18 (1984) 1355–1360.
- [13] S. Jose, L. Mishra, S. Debnath, S. Pal, P.K. Munda, G. Basu, Improvement of water quality of remnant from chemical retting of coconut fibre through electrocoagulation and activated carbon treatment, *J. Clean. Prod.* 210 (2019) 630–637.
- [14] P.K. Holt, *Electrocoagulation: unravelling and synthesising the mechanisms behind a water treatment process*, (2002).
- [15] K. Padmaja, J. Cherukuri, M.A. Reddy, A comparative study of the efficiency of chemical coagulation and electrocoagulation methods in the treatment of pharmaceutical effluent, *J. Water Process Eng.* 34 (2020) 101153.
- [16] H. Liu, X. Zhao, J. Qu, *Electrocoagulation in water treatment*, in: *Electrochem. Environ.*, Springer, 2010: pp. 245–262.
- [17] C. Barrera-Díaz, B. Bilyeu, G. Roa, L. Bernal-Martinez, Physicochemical aspects of electrocoagulation, *Sep. Purif. Rev.* 40 (2011) 1–24.
- [18] A. Shahedi, A.K. Darban, F. Taghipour, A. Jamshidi-Zanjani, A review on industrial wastewater treatment via electrocoagulation processes, *Curr. Opin. Electrochem.* 22 (2020) 154–169.
- [19] M. Al-Shannag, W. Lafi, K. Bani-Melhem, F. Gharagheer, O. Dhaimat, Reduction of COD and TSS from paper industries wastewater using electro-coagulation and chemical coagulation, *Sep. Sci. Technol.* 47 (2012) 700–708.
- [20] M.F. Ni`Am, F. Othman, J. Sohaili, Z. Fauzia, Electrocoagulation technique in enhancing COD and suspended solids removal to improve wastewater quality, *Water Sci. Technol.* 56 (2007) 47–53.
- [21] I. Amri, Pratiwi Destinefa, Zultiniar, Pengolahan limbah cair tahu menjadi air bersih dengan metode elektrokoagulasi secara kontinyu, *Chempublish J.* 5 (2020) 57–67. <https://doi.org/10.22437/chp.v5i1.7651>.
- [22] dan S. Kurratul uyun, Illim, Studi Pengaruh Potensial, Waktu Kontak, Dan pH Terhadap Metode Elektokoagulasi Limbah Cair Restoran Menggunakan Elektroda Fe Dengan Susunan Monopolar Dan Dipolar, *J. Ilm. Biol. Eksperimen Dan Keanekaragaman Hayati.* 3 (2012) 445–450. <https://jurnal.fmipa.unila.ac.id/index.php/snsmap/article/view/1612>.
- [23] S. Bellebia, S. Kacha, A.Z. Bouyakoub, Z. Derriche, Experimental investigation of chemical oxygen demand and turbidity removal from cardboard paper mill effluents using combined electrocoagulation and adsorption processes, *Environ. Prog. Sustain. Energy.* 31 (2012) 361–370.
- [24] M. Ahmadian, N. Yousefi, S.W. Van Ginkel, M.R. Zare, S. Rahimi, A. Fatehizadeh, Kinetic study of slaughterhouse wastewater treatment by electrocoagulation using Fe electrodes, *Water Sci. Technol.* 66 (2012) 754–760.
- [25] H. Ghahremani, S. Bagheri, S.M. Hassani, M.R. Khoshchreh, Treatment of dairy industry wastewater using an electrocoagulation process, *Adv. Environ. Biol.* 6 (2012) 1897–1901.
- [26] S. Bener, Ö. Bulca, B. Palas, G. Tekin, S. Atalay, G. Ersöz, Electrocoagulation process for the treatment of real textile wastewater: Effect of operative conditions on the organic carbon removal and kinetic study,

- Process Saf. Environ. Prot. 129 (2019) 47–54.
- [27] P. V Nidheesh, J. Scaria, D.S. Babu, M.S. Kumar, An overview on combined electrocoagulation-degradation processes for the effective treatment of water and wastewater, *Chemosphere*. 263 (2021) 127907.
- [28] C.Y. Teh, P.M. Budiman, K.P.Y. Shak, T.Y. Wu, Recent advancement of coagulation–flocculation and its application in wastewater treatment, *Ind. Eng. Chem. Res.* 55 (2016) 4363–4389.
- [29] G.B. Raju, M.T. Karuppiyah, S.S. Latha, S. Parvathy, S. Prabhakar, Treatment of wastewater from synthetic textile industry by electrocoagulation–electrooxidation, *Chem. Eng. J.* 144 (2008) 51–58. <https://doi.org/10.1016/j.cej.2008.01.008>.
- [30] P.I. Omwene, M. Kobya, O.T. Can, Phosphorus removal from domestic wastewater in electrocoagulation reactor using aluminium and iron plate hybrid anodes, *Ecol. Eng.* 123 (2018) 65–73. <https://doi.org/10.1016/j.ecoleng.2018.08.025>.
- [31] T. Rookesh, M.R. Samaei, S. Yousefinejad, H. Hashemi, Z. Derakhshan, F. Abbasi, M. Jalili, S. Giannakis, M. Bilal, Investigating the Electrocoagulation Treatment of Landfill Leachate by Iron/Graphite Electrodes: Process Parameters and Efficacy Assessment, *Water*. 14 (2022) 205. <https://doi.org/10.3390/w14020205>.
- [32] M. Kobya, M. Bayramoglu, M. Eyvaz, Techno-economical evaluation of electrocoagulation for the textile wastewater using different electrode connections, *J. Hazard. Mater.* 148 (2007) 311–318. <https://doi.org/10.1016/j.jhazmat.2007.02.036>.
- [33] H.J. Seltman, Experimental design and analysis, (2012).
- [34] N. Sriwijaya, Songket Industry Wastewater Processing Using Electrocoagulation Method, *J. Eng. Des. Technol.* 19 (2019) 47–53.
- [35] P. Holt, G. Barton, C. Mitchell, Electrocoagulation as a wastewater treatment, *Third Annu. Aust. Environ. Eng. Res. Event*. 1000 (1999) 41–46.
- [36] C.E. Barrera-Díaz, P. Balderas-Hernández, B. Bilyeu, Electrocoagulation: Fundamentals and prospectives, in: *Electrochem. Water Wastewater Treat.*, Elsevier, 2018; pp. 61–76.
- [37] O. Khalifa, F. Banat, C. Srinivasakannan, J. Radjenovic, S.W. Hasan, Performance tests and removal mechanisms of aerated electrocoagulation in the treatment of oily wastewater, *J. Water Process Eng.* 36 (2020) 101290.
- [38] R. Rusdianasari, A. Taqwa, J. Jaksen, A. Syakdani, Treatment optimization of electrocoagulation (EC) in purifying palm oil mill effluents (POMEs), *J. Eng. Technol. Sci.* 49 (2017) 604–616.
- [39] P.K. Holt, G.W. Barton, M. Wark, C.A. Mitchell, A quantitative comparison between chemical dosing and electrocoagulation, *Colloids Surfaces A Physicochem. Eng. Asp.* 211 (2002) 233–248.
- [40] S. Vasudevan, J. Lakshmi, G. Sozhan, Effects of alternating and direct current in electrocoagulation process on the removal of cadmium from water, *J. Hazard. Mater.* 192 (2011) 26–34.
- [41] G. Sayiner, F. Kandemirli, A. Dimoglo, Evaluation of boron removal by electrocoagulation using iron and aluminum electrodes, *Desalination*. 230 (2008) 205–212.
- [42] A.S. Fajardo, R.F. Rodrigues, R.C. Martins, L.M. Castro, R.M. Quinta-Ferreira, Phenolic wastewaters treatment by electrocoagulation process using Zn anode, *Chem. Eng. J.* 275 (2015) 331–341. <https://doi.org/https://doi.org/10.1016/j.cej.2015.03.116>.
- [43] F. Hanum, R. Tambun, M.Y. Ritonga, W.W. Kasim, Aplikasi elektrokoagulasi dalam pengolahan limbah cair pabrik kelapa sawit, *J. Tek. Kim. USU*. 4 (2015) 13–17.
- [44] L. Szpyrkowicz, Hydrodynamic effects on the performance of electro-coagulation/electro-flotation for the removal of dyes from textile wastewater, *Ind. Eng. Chem. Res.* 44 (2005) 7844–7853.
- [45] M.M. Emamjomeh, M. Sivakumar, Review of pollutants removed by electrocoagulation and electrocoagulation/flotation processes, *J. Environ. Manage.* 90 (2009) 1663–1679.
- [46] C.H. Tan, M.Z. MatJafri, H.S. Lim, Transmittance Optical Properties Investigation of Aluminium Ions Aqueous Solution, in: *AIP Conf. Proc.*, American Institute of Physics, 2011; pp. 315–317.
- [47] B. Chezeau, L. Boudriche, C. Vial, A. Boudjemaa, Treatment of dairy wastewater by electrocoagulation process: advantages of combined iron/aluminum electrodes, *Sep. Sci. Technol.* 55 (2020) 2510–2527.
- [48] S.K. Verma, V. Khandegar, A.K. Saroha, Removal of chromium from electroplating industry effluent using electrocoagulation, *J. Hazardous, Toxic, Radioact. Waste*. 17 (2013) 146–152.
- [49] V. Khandegar, A.K. Saroha, Electrocoagulation for the treatment of textile industry effluent – A review, *J. Environ. Manage.* 128 (2013) 949–963. <https://doi.org/10.1016/j.jenvman.2013.06.043>.
- [50] X. Li, J. Song, J. Guo, Z. Wang, Q. Feng, Landfill leachate treatment using electrocoagulation, *Procedia Environ. Sci.* 10 (2011) 1159–1164. <https://doi.org/10.1016/j.proenv.2011.09.185>.
- [51] J. Nouri, A.H. Mahvi, E. Bazrafshan, Application of electrocoagulation process in removal of zinc and copper from aqueous solutions by aluminum electrodes, *Int. J. Environ. Res.* 4 (2010) 201–208.
- [52] S. Koyuncu, S. Arıman, Domestic wastewater treatment by real-scale electrocoagulation process, *Water Sci. Technol.* 81 (2020) 656–667. <https://doi.org/10.2166/wst.2020.128>.
- [53] P.N. Alam, Yulianis, H.L. Pasya, R. Aditya, I.N. Aslam, K. Pontas, Acid mine wastewater treatment using electrocoagulation method, *Mater. Today Proc.* 63 (2022) S434–S437.

- <https://doi.org/10.1016/j.matpr.2022.04.089>.
- [54] P. Maha Lakshmi, P. Sivashanmugam, Treatment of oil tanning effluent by electrocoagulation: Influence of ultrasound and hybrid electrode on COD removal, *Sep. Purif. Technol.* 116 (2013) 378–384. <https://doi.org/10.1016/j.seppur.2013.05.026>.
- [55] B. Tak, B. Tak, Y. Kim, Y. Park, Y. Yoon, G. Min, Optimization of color and COD removal from livestock wastewater by electrocoagulation process: Application of Box–Behnken design (BBD), *J. Ind. Eng. Chem.* 28 (2015) 307–315. <https://doi.org/10.1016/j.jiec.2015.03.008>.
- [56] M. Al-Shannag, W. Lafi, K. Bani-Melhem, F. Gharagheer, O. Dhaimat, Reduction of COD and TSS from Paper Industries Wastewater using Electro-Coagulation and Chemical Coagulation, *Sep. Sci. Technol.* 47 (2012) 700–708. <https://doi.org/10.1080/01496395.2011.634474>.
- [57] Y.Y. Sia, I.A.W. Tan, M.O. Abdullah, Palm Oil Mill Effluent Treatment Using Electrocoagulation-Adsorption Hybrid Process, *Mater. Sci. Forum.* 997 (2020) 139–149. <https://doi.org/10.4028/www.scientific.net/MSF.997.139>.
- [58] A.A. Al-Othman, P. Kaur, M.A. Imteaz, M.E. Hashem Ibrahim, M. Sillanpää, M.A. Mohamed Kamal, Modified bio-electrocoagulation system to treat the municipal wastewater for irrigation purposes, *Chemosphere.* 307 (2022) 135746. <https://doi.org/10.1016/j.chemosphere.2022.135746>.
- [59] G.F.S. Valente, R.C. Santos Mendonça, J.A.M. Pereira, L.B. Felix, The efficiency of electrocoagulation in treating wastewater from a dairy industry, Part I: Iron electrodes, *J. Environ. Sci. Heal. Part B.* 47 (2012) 355–361. <https://doi.org/10.1080/03601234.2012.646174>.
- [60] A. Nur, A. Jatnik, Aplikasi elektrokoagulasi pasangan elektroda aluminium pada proses daur ulang Grey Water Hotel, *J. Tek. Lingkungan.* 20 (2014) 58–67.
- [61] R. Ardiansyah, T.M. Putra, D.R. Suminar, A. Ngatin, Pengaruh Waktu Proses pada Desalinasi Air Laut dengan Metode Elektrokoagulasi secara Batch, *Fluida.* 14 (2021) 65–72.
- [62] N. Nurhidayah, S. Samsidar, L. Handayani, R. Rustan, Pengaruh Variasi Jarak Elektroda Dan Waktu Terhadap Ph Dan Tds Limbah Cair Batik Menggunakan Metode Elektrokoagulasi, *J. Online Phys.* (2020).
- [63] A. Benhadji, M.T. Ahmed, R. Maachi, Electrocoagulation and effect of cathode materials on the removal of pollutants from tannery wastewater of Rouïba, *Desalination.* 277 (2011) 128–134.
- [64] F.K. Hasibuan, Perbandingan Efisiensi Elektroda Aluminium (Al), Besi (Fe) dan Seng (Zn) dalam Menyisihkan Nitrat dan Fosfat dengan Proses Elektrokoagulasi, (2018).
- [65] V. Khandegar, A.K. Saroha, Electrocoagulation for the treatment of textile industry effluent--a review., *J. Environ. Manage.* 128 (2013) 949–963.
- [66] E. Enjarlis, S. Hartanto, M. Christwardana, B.F. Sijabat, O.R. Fatlan, Kombinasi Proses Elektrokoagulasi–Oksidasi Lanjut Berbasis O3/GAC Pada Limbah Cair Industri Batik, *J. Rekayasa Kim. Lingkungan.* 14 (2019) 44–52.
- [67] F.A. Radityani, S. Hariyadi, S. Suprihatin, D.H.Y. Yanto, S.H. Anita, Penerapan Teknik Elektrokoagulasi dalam Pengurangan Bahan Organik Air Limbah Kegiatan Perikanan, *J. Ilmu Pertan. Indones.* 25 (2020).
- [68] Y. Yunitasari, S. Elystia, I. Andesgur, Metode Elektrokoagulasi untuk Mengolah Limbah Cair Batik di Unit Kegiatan Masyarakat Rumah Batik Andalan PT. Riau Andalan Pulp and Paper (RAPP), *Jom F Tek.* 4 (2017) 1–9.
- [69] M. Kobya, O.T. Can, M. Bayramoglu, Treatment of textile wastewaters by electrocoagulation using iron and aluminum electrodes, *J. Hazard. Mater.* 100 (2003) 163–178.
- [70] K. Yetilmesoy, F. Ilhan, Z. Sapci-Zengin, S. Sakar, M.T. Gonullu, Decolorization and COD reduction of UASB pretreated poultry manure wastewater by electrocoagulation process: A post-treatment study, *J. Hazard. Mater.* 162 (2009) 120–132.
- [71] M.G. Arroyo, V. Pérez-Herranz, M.T. Montañés, J. García-Antón, J.L. Guiñón, Effect of pH and chloride concentration on the removal of hexavalent chromium in a batch electrocoagulation reactor, *J. Hazard. Mater.* 169 (2009) 1127–1133. <https://doi.org/10.1016/j.jhazmat.2009.04.089>.
- [72] R. Ardiansyah, T.M. Putra, D.R. Suminar, A. Ngatin, Pengaruh Waktu Pada Proses Elektrokoagulasi Air Laut Secara Batch, *J. Fluida.* 14 (2021) 65–72.
- [73] Y. Fendriani, Nurhidayah, L. Handayani, Samsidar, Rustan, Pengaruh Variasi Jarak Elektroda Dan Waktu Terhadap Ph Dan Tds Limbah Cair Batik Menggunakan Metode Elektrokoagulasi, *J. Online Phys.* 5 (2020) 59–64. <https://doi.org/10.22437/jop.v5i2.9869>.
- [74] E. Wiyanto, B. Harsono, A. Makmur, R. Pangputra, J. Julita, M.S. Kurniawan, Penerapan Elektrokoagulasi Dalam Proses Penjernihan Limbah Cair, (2017).
- [75] J. Feng, Y. Sun, Z. Zheng, J. Zhang, L.I. Shu, Y. Tian, Treatment of tannery wastewater by electrocoagulation, *J. Environ. Sci.* 19 (2007) 1409–1415.
- [76] E. Bazrafshan, H. Moein, F. Kord Mostafapour, S. Nakhaie, Application of Electrocoagulation Process for Dairy Wastewater Treatment, *J. Chem.* 2013 (2013) 1–8. <https://doi.org/10.1155/2013/640139>.

Neutralization of Acidity (pH) and Reduction of Total Suspended Solids (TSS) by Solar-Powered Electrocoagulation System

ORIGINALITY REPORT

14%

SIMILARITY INDEX

9%

INTERNET SOURCES

11%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Evangelos Bellos, Christos Tzivanidis. "A review of concentrating solar thermal collectors with and without nanofluids", *Journal of Thermal Analysis and Calorimetry*, 2018
Publication <1 %

- 2 www.jpmpm.org
Internet Source <1 %

- 3 Abhinesh Kumar Prajapati, Parmesh Kumar Chaudhari. "Physicochemical Treatment of Distillery Wastewater—A Review", *Chemical Engineering Communications*, 2015
Publication <1 %

- 4 Masoud Moradi, Yasser Vasseghian, Hossein Arabzade, Amin Mousavi Khaneghah. "Various wastewaters treatment by sono-electrocoagulation process: A comprehensive review of operational parameters and future outlook", *Chemosphere*, 2021
Publication <1 %

5	qspace.qu.edu.qa Internet Source	<1 %
6	tf.ni.ac.rs Internet Source	<1 %
7	www.tandfonline.com Internet Source	<1 %
8	atrium.lib.uoguelph.ca Internet Source	<1 %
9	eprints.qut.edu.au Internet Source	<1 %
10	Neanderson Galvão, Jeanette Beber de Souza, Carlos Magno de Sousa Vidal. "Landfill leachate treatment by electrocoagulation: Effects of current density and electrolysis time", Journal of Environmental Chemical Engineering, 2020 Publication	<1 %
11	www.grafiati.com Internet Source	<1 %
12	arxiv.org Internet Source	<1 %
13	ipco-co.com Internet Source	<1 %
14	mafiadoc.com Internet Source	<1 %

15 Lucas Pandolphi Zini, Marielen Longhi, Eliena Jonko, Marcelo Giovanela. "Treatment of automotive industry wastewater by electrocoagulation using commercial aluminum electrodes", Process Safety and Environmental Protection, 2020
Publication <1 %

16 ijoems.com
Internet Source <1 %

17 pharmacy.mahidol.ac.th
Internet Source <1 %

18 Kamel Hendaoui, Fadhila Ayari, Iyadh Ben Rayana, Raja Ben Ammar, Fadhila Darragi, Malika Trabelsi-Ayadi. "Real indigo dyeing effluent decontamination using continuous electrocoagulation cell: study and optimization using Response Surface Methodology", Process Safety and Environmental Protection, 2018
Publication <1 %

19 Matthew Reilly, Andrew P Cooley, Duarte Tito, Savvas A Tassou, Michael K Theodorou. "Electrocoagulation treatment of dairy processing and slaughterhouse wastewaters", Energy Procedia, 2019
Publication <1 %

20 Noura Najid, Sanaa Kouzbour, Alejandro Ruiz-García, Soukaina Fellaou, Bouchaib Gourich, Youssef Stiriba. "Comparison analysis of different technologies for the removal of boron from seawater: A review", Journal of Environmental Chemical Engineering, 2021
Publication <1 %

21 Submitted to Universitas Negeri Jakarta
Student Paper <1 %

22 cob.silverchair-cdn.com
Internet Source <1 %

23 jspac.etb.iau.ir
Internet Source <1 %

24 medcraveonline.com
Internet Source <1 %

25 Ezechi, Ezerie Henry, Mohamed Hasnain Isa, Shamsul Rahman Mohamed Kutty, and Asim Yaqub. "Boron removal from produced water using electrocoagulation", Process Safety and Environmental Protection, 2014.
Publication <1 %

26 nemertes.library.upatras.gr
Internet Source <1 %

27 publications.waset.org
Internet Source <1 %

28

Internet Source

<1 %

29

univ-blida.dz

Internet Source

<1 %

30

Idral Amri, Pratiwi Destinefa, Zultiniar.
"Pengolahan limbah cair tahu menjadi air
bersih dengan metode elektrokoagulasi
secara kontinyu", CHEMPUBLISH JOURNAL,
2020

Publication

<1 %

31

Khaled Mansouri, Karim Ibrik, Nasr Bensalah,
Ahmed Abdel-Wahab. "Anodic Dissolution of
Pure Aluminum during Electrocoagulation
Process: Influence of Supporting Electrolyte,
Initial pH, and Current Density", Industrial &
Engineering Chemistry Research, 2011

Publication

<1 %

32

Meysam Kohzadi Chegeni, Ahmad Shahedi,
Ahmad Khodadadi Darban, Ahmad Jamshidi-
Zanjani, Mehdi Homae. "Simultaneous
removal of lead and cyanide from the
synthetic solution and effluents of gold
processing plants using electrochemical
method", Journal of Water Process
Engineering, 2021

Publication

<1 %

33

medjchem.com

Internet Source

<1 %

34

prism.ucalgary.ca

Internet Source

<1 %

35

www.degruyter.com

Internet Source

<1 %

36

www.deswater.com

Internet Source

<1 %

37

Angelo Earvin Sy Choi, Cybelle Concepcion Morales Futralan, Jurng-Jae Yee. "Fuzzy optimization for the removal of uranium from mine water using batch electrocoagulation: A case study", Nuclear Engineering and Technology, 2019

Publication

<1 %

38

Djamel Ghernaout, Badiaa Ghernaout, Amara Kellil. "Natural organic matter removal and enhanced coagulation as a link between coagulation and electrocoagulation", Desalination and Water Treatment, 2012

Publication

<1 %

39

Emamjomeh, Mohammad.M.. "Review of pollutants removed by electrocoagulation and electrocoagulation/flotation processes", Journal of Environmental Management, 200904

Publication

<1 %

40

Forat Yasir Aljaberi, Saja Mohsen Alardhi, Shaymaa A. Ahmed, Ali Dawood Salman et al. "Can electrocoagulation technology be integrated with wastewater treatment systems to improve treatment efficiency?", Environmental Research, 2022

Publication

<1 %

41

Mohammed JK. Bashir, Jun Hong Lim, Salem S. Abu Amr, Lai Peng Wong, Yoke Leng Sim. "Post treatment of palm oil mill effluent using electro-coagulation-peroxidation (ECP) technique", Journal of Cleaner Production, 2019

Publication

<1 %

42

Mohd Najib Razali, Muhamed Yusuf Shahul Hamid, Abdul Aziz Mohd Azoddein. "Recovery of mineral oil from waste emulsion using electrocoagulation method", MATEC Web of Conferences, 2016

Publication

<1 %

43

Omprakash Sahu, Bidyut Mazumdar, P. K. Chaudhari. "Treatment of wastewater by electrocoagulation: a review", Environmental Science and Pollution Research, 2013

Publication

<1 %

44

www.nature.com

Internet Source

<1 %

45

Adi Fathi Nor Asikin, Norhafezah Kasmuri, Mohd Fozi Ali. "Production of Bricks from Sludge of Palm Oil Mill Effluent (POME)", Key Engineering Materials, 2021

Publication

<1 %

46

Idral Amri, Zuqni Meldha, Syamsu Herman, Della Karmila, Mhd. Fadilah Ramadani, Nirwana. "Effects of electric voltage and number of aluminum electrodes on continuous electrocoagulation of liquid waste from the palm oil industry", Materials Today: Proceedings, 2023

Publication

<1 %

47

Li, Chen, Chengwen Song, Ping Tao, Menghan Sun, Zonglin Pan, Tonghua Wang, and Mihua Shao. "Enhanced separation performance of coal-based carbon membranes coupled with an electric field for oily wastewater treatment", Separation and Purification Technology, 2016.

Publication

<1 %

48

Murdani, Jakfar, D Ekawati, R Nadira, Darmadi. "Application of Response Surface Methodology (RSM) for wastewater of hospital by using electrocoagulation", IOP Conference Series: Materials Science and Engineering, 2018

Publication

<1 %

49

Roa-Morales, G.. "Aluminum electrocoagulation with peroxide applied to wastewater from pasta and cookie processing", Separation and Purification Technology, 20070315

Publication

<1 %

50

Rona Cuana, Andi Marwanti Panre, Nurul Imani Istiqomah, Rivaldo Marsel Tumbelaka et al. "Green Synthesis of Fe₃O₄/Chitosan Nanoparticles Utilizing Moringa Oleifera Extracts and Their Surface Plasmon Resonance Properties", ECS Journal of Solid State Science and Technology, 2022

Publication

<1 %

51

S. Mahesh, B. Prasad, I. D. Mall, I. M. Mishra. "Electrochemical Degradation of Pulp and Paper Mill Wastewater. Part 1. COD and Color Removal", Industrial & Engineering Chemistry Research, 2006

Publication

<1 %

52

Zidane, F.. "Decolourization of dye-containing effluent using mineral coagulants produced by electrocoagulation", Journal of Hazardous Materials, 20080630

Publication

<1 %

53

acris.aalto.fi
Internet Source

<1 %

54	core.ac.uk Internet Source	<1 %
55	ert.yildiz.edu.tr Internet Source	<1 %
56	iopscience.iop.org Internet Source	<1 %
57	jeas.springeropen.com Internet Source	<1 %
58	mspace.lib.umanitoba.ca Internet Source	<1 %
59	researchmgt.monash.edu Internet Source	<1 %
60	spectrum.library.concordia.ca Internet Source	<1 %
61	vtechworks.lib.vt.edu Internet Source	<1 %
62	www.insightsociety.org Internet Source	<1 %
63	www.medjchem.com Internet Source	<1 %
64	www.researchgate.net Internet Source	<1 %
65	www.science.gov Internet Source	<1 %

66

www.scribd.com

Internet Source

<1 %

67

www.semanticscholar.org

Internet Source

<1 %

68

www.slideshare.net

Internet Source

<1 %

69

Özlem Bulca, Burcu Palas, Süheyda Atalay, Gülin Ersöz. "Performance investigation of the hybrid methods of adsorption or catalytic wet air oxidation subsequent to electrocoagulation in treatment of real textile wastewater and kinetic modelling", Journal of Water Process Engineering, 2020

Publication

<1 %

70

Debasree Purkayastha, Umesh Mishra, Swarup Biswas. "A comprehensive review on Cd(II) removal from aqueous solution", Journal of Water Process Engineering, 2014

Publication

<1 %

71

Stockdale, Lisa, and Robert Newton. "A Review of Preventative Methods against Human Leishmaniasis Infection", PLoS Neglected Tropical Diseases, 2013.

Publication

<1 %

72

Abdulkarim Almukdad, MhdAmmar Hafiz, Ahmed T. Yasir, Radwan Alfahel, Alaa H. Hawari. "Unlocking the application potential

<1 %

of electrocoagulation process through hybrid processes", Journal of Water Process Engineering, 2021

Publication

73

Zakaria Al-Qodah, Mohammad Al-Shannag. "Heavy metal ions removal from wastewater using electrocoagulation processes: A comprehensive review", Separation Science and Technology, 2017

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On